

Magnetventil servostyrd 5/2 alt. 3/2 i monostabilt utförande

Solenoid valve servo assisted 5/2 alt. 3/2 in single stable version



DC: 12V, 24V
AC: 24V, 48V, 115V, 230V



Beskrivning

Magnetventil med anslutningsbild enl. Namurstandard avsedd för direktmontage på pneumatiska manöverdon. Ventilen kan användas som 5/2 alt. 3/2 ventil genom att ändra på en tätningsplatta på anslutningsidan mot manöverdonet. Ventilen är utrustad med handmanövermöjlighet och vid normal drift är denna ställskruven ställd i läge "0".


Description

Solenoid valve with connection according to Namur-standard for direct mounting of pneumatic actuators. The valve is available in either 5/2 or 3/2 version. The solenoid valve is equipped with local control screw for manual operation. In normal operation this screw is set in position "0".




Magnetventil servostyrd 5/2 alt. 3/2 i monostabilt utförande


Solenoid valve servo assisted 5/2 alt. 3/2 in single stable version

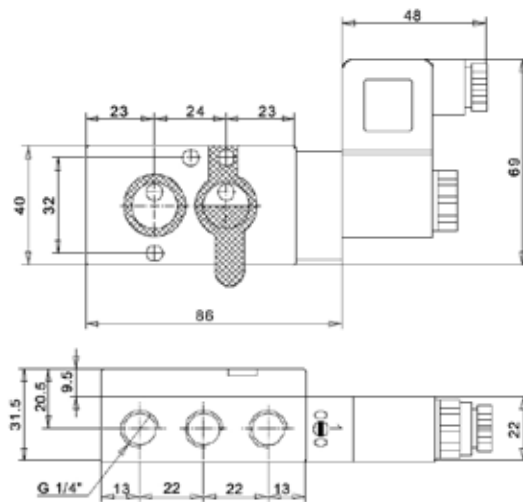

3/2-vägs magnetventil



5/2-vägs magnetventil



Teknisk information / Technical information

Hus	Body	Anodiserad Aluminium / Anodised Aluminium
Bult	Bolts	Rostfritt stål, Stainless steel (A2, AISI 304)
Tätningar	Seals	NBR
Kolv	Piston	Rostfritt stål / Stainless steel AISI 303
Kopplingsplatta Namur	Namur coupling plate	PA6-30% glas fibre
Luftanslutning	Air entry	G 1/4"
Dimension	Dimension	5,5 mm
Lufttryck	Air pressure	2–10 bar
Temperatur	Temperature	-10°C–50°C
Spänning	Voltage	(DC: 12V, 24V) (AC: 24V, 48V, 115V, 230V)
Förbrukning	Power consumption	DC: 3W / AC: 5VA
Luftflöde	Air flow	950 l/min